

fxo536M25GE *(preliminary)*

FXO 25GigE

With the modern Sony Pregius S sensor, the FXO 25GigE offers outstanding image quality together with an economical high-performance interface. Distances up to 10,000 meter are supported. The control is transparent to GigE Vision.

The solid, CNC-milled housing offers excellent temperature management gives excellent image homogeneity.

The large image memory supports the rapid triggering of image sequences regardless of the network load.



Technical Highlights

- > Excellent homogeneity across the entire image
- > Thermally optimized, milled aluminum housing
- > 25GigE Interface
- > Integrated 4-channel LED strobe controller
- > ROI, lookup tables
- > Binning with frame rate boost
- > C mount
- > IO interface with 2xIN, 4xOUT, Opto and RS232
 - with SafeTrigger, programmable timers, logic functions (PLC) and sequencer

FXO Series

fxo536M25GE (preliminary)

Please note: This product is preliminary.

Technical specifications might change.

Resolution [MP]	8.1 MP
Resolution (h x v)	2848 x 2848 px
Frame rate (max.)	195 fps
Chroma	mono
Interface	25GigE (SFP)

Sensor

Sensor	IMX536AAMJ
Manufacturer	Sony
Sensor type	Area CMOS
Shutter type	global shutter
Sensor size (h x v)	7.8 x 7.8 mm
Optical diagonal	11.04 mm
Sensor format	11.1mm (2/3)
Pixel size (h x v)	2.74 x 2.74 μm

Camera

Exposure modes	MANUAL;AUTO
Exposure time (min)	21 μs
Exposure time (max)	1 sec
Pixel format / max	mono8, mono12 / 12 bit
Gain modes	manual, auto
S/N ratio (max)	39 dB (dep. on environment)
Dynamic range (max)	72 dB (dep. on environment)
Internal memory	1024 MB SDRAM, 256 MB Flash

Feature Set

AOI	yes
LUT	yes
Offset	yes
Binning	yes
Image flip	yes
Shading correction	yes (external)
Defect pixel correction	yes
Sequencer	yes
POE	yes
PTP	yes


Housing

Lens mount	C-Mount
Dimensions (w x h x d)	50 x 50 x 100 mm
Operating temperature (housing)	-10 to 60 °C
Protection class	IP30
Filter-/Coverglass	K9 - AR coating - 400-850nm

I/O-Interfaces

Input up to 24V	2 x
Input OPTO	1 x
Output open drain	4 x
I/O RS-232	1 x
Power supply	10 to 25 V (DC)
Power consumption	15.5 W (dep. on operating mode)


Dimensions [mm]

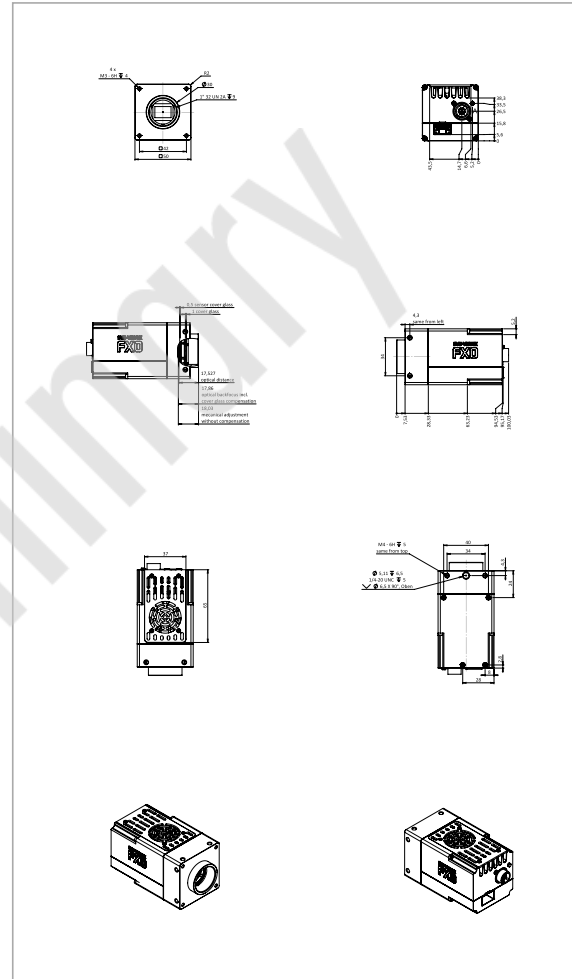

Pinout Mating Connector

Hirose 12 Pin	1 VIN - (GND)	7 OUT 1 (open drain)
	2 VIN + (10 V to 25 V DC)	8 OUT 2 (open drain)
	3 IN 4 (RXD RS232)	9 IN 3 + (opto In +)
	4 OUT 4 (TXD RS232)	10 IN 3 - (opto In -)
	5 IN 1 (0-24V)	11 OUT 3 (open drain)
	6 IN 2 (0-24V)	12 OUT 0 (open drain)

Spectral Response *

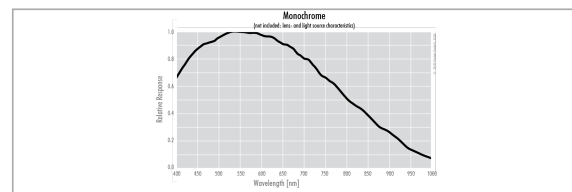

* Sensor data – excludes camera cover- or IR-cut filter characteristics

